WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.




CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slighly damperned clean clorth (use clean water, never a solvent) to wipe the interior surface of the fixture.
Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


* Please make sure that you have all parts indicated before you begin assembly of this item
* This item should be assembled on a soft surface to prevent scratching the finish during assembly
* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
*The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire connector		3X	G	Long Stem		2X
B	Crossbar		1X	H	Shade A		1X
C	Outlet box screw		2X	I	Metal Frame		1X
D	Canopy		1X	J	Bulb		7X
E	Canopy Nut		2X	K	Shade B		1X
F	Short Stem		2X	L	Shade C		1X

JONATHAN Y

Model#: JYL9564
Product Dimensions: 24"LX24"WX31.25-61.25"H
Product Dimensions: 61X61X79.4-155.6CM

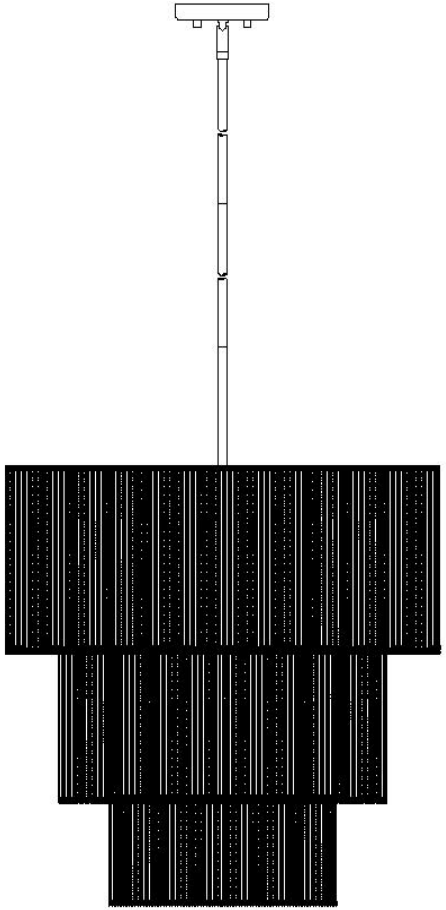

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.
Estimated Assembly Time: 25 minutes.
The number of people required to assemble the product:1 person.


If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com

1.Attach the Mounting Plate(B) to the junction box with outlet box screw(C).

2: Separate the bent pipe of the metal frame**(I)** and spread it evenly

3:Screw the Short Stem(F),Long Stem(G) ,Make sure to feed the branchwires of the fixture through the stems during assembly. Remove or add stems to adjust the height.Then screw the canopy (D) to the shade A(H)

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

4.Connect the wire with wire connector (A) accordingly.


5.Attach the Canopy(D) to the Mounting Plate (B) , and fix it by turning the Canopy Nut (E) clockwise

6.Install the shade A(H),shade B(K),shadeC(L) to the hook and fix to the loop ring.

7. install the light bulb(J) to the metal frame(I).

PLEASE USE TYPE"B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT THERE IS LED 4-WATT BULB IN THE BOX

ENJOY YOUR LAMP

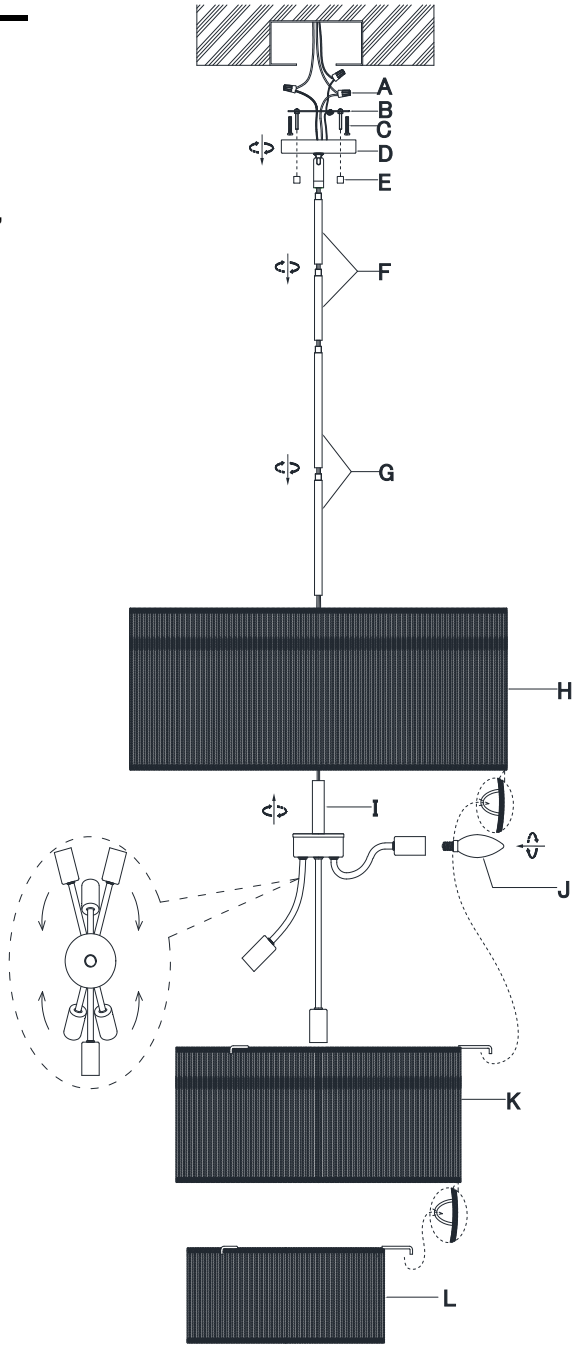

ADVERTENCIA

RECOMENDAMOS que la instalación de este dispositivo de iluminación sea realizada por un eléctrico con licencia.
ADVERTENCIA *** Apagar el suministro eléctrico principal desde la caja de fusión principal / circuito
INTERRUPTOR ANTES DE LA INSTALACIÓN.
Inspeccione el artículo con cuidado antes de intentar instalarlo. Si hay algún daño o
DEFECTO OBVIDO, NO INSTALAR. El artículo no puede ser devuelto una vez que se ha instalado.




CUIDADO Y MANTENEMENTO

Para limpiar el exterior del accesorio, use un paño limpio seco o ligeramente humedecido (use agua limpia, nunca un disolvente) para limpiar la superficie del accesorio.
Para limpiar el interior del accesorio, primero desconecte la alimentación al accesorio apagando el interruptor o retirando el fusible en la caja del fusible. A continuación, use un clorth limpio seco o suavemente amortiguado (use agua limpia, nunca un disolvente) para limpiar la superficie interior del accesorio.
No utilice limpiadores con productos químicos, disolventes o abrasivos duros. Usa solo un paño seco y suave para polvificar o limpiar con cuidado.

AVISO E INSTRUCCIONES IMPORTANTES DE SEGURIDAD


* Asegúrese de tener todas las partes indicadas antes de comenzar el montaje de este artículo
* Este artículo debe montarse en una superficie suave para evitar rascarse el acabado durante el montaje
* Para reducir el riesgo de incendio, choque eléctrico o lesiones a personas o bienes, siga las directrices a continuación para un uso e instalación seguros.
* El cable o cable flexible externo de esta luminaria no se puede reemplazar
Si el cable está dañado, la luminaria será destruida.

Lista de piezas y lista de hardware

Pieza	descripción	Imagen	cantidad	Pieza	descripción	Imagen	cantidad
A	Conector para cables		3X	G	Vástago largo		2X
B	Barra cruzada		1X	H	Pantalla A		1X
C	Tornillo para caja de conexiones		2X	I	Marco metálico		1X
D	Campana		1X	J	Bombilla		7X
E	Tuerca para campana		2X	K	Pantalla B		1X
F	Vástago corto		2X	L	Pantalla C		1X

JONATHAN Y

Modelo#:: JYL9564
Dimensiones del producto: 24"LX24"WX31.25-61.25"H
Dimensiones del producto: 61X61X79.4-155.6CM

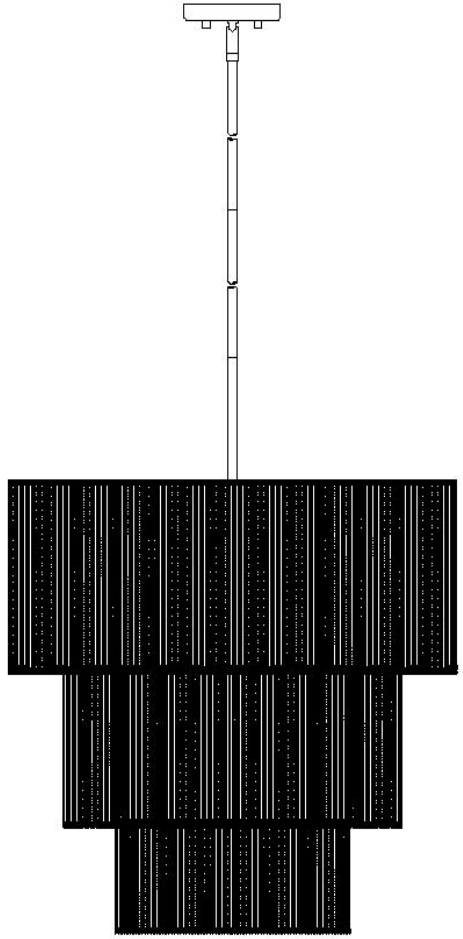


PREPARACIÓN


Antes de comenzar el ensamblaje del producto, asegúrese de que todas las piezas estén presentes. Compare las piezas con la lista de contenido del paquete y la lista de hardware. Si falta alguna pieza o está dañada, no intente ensamblar el producto. Tiempo estimado de ensamblaje: 25 minutos.
Número de personas requeridas para el montaje del producto: 1 persona.

Si tiene alguna pregunta relacionada con defectos, piezas faltantes, problemas de ensamblaje, reemplazos o problemas de conectividad del dispositivo, envíe un correo electrónico detallado a cs@jonathany.com

1. Fije la Placa de Montaje (B) a la caja de conexiones con el tornillo de la caja (C).
2: Separe el tubo doblado del marco metálico (I) y extiéndalo uniformemente
3: Enrosque el Vástago Corto (F) y el Vástago Largo (G). Asegúrese de pasar los cables ramales de la luminaria a través de los vástagos durante el ensamblaje. Retire o agregue vástagos para ajustar la altura. Luego enrosque la campana (D) a la Pantalla A (H)

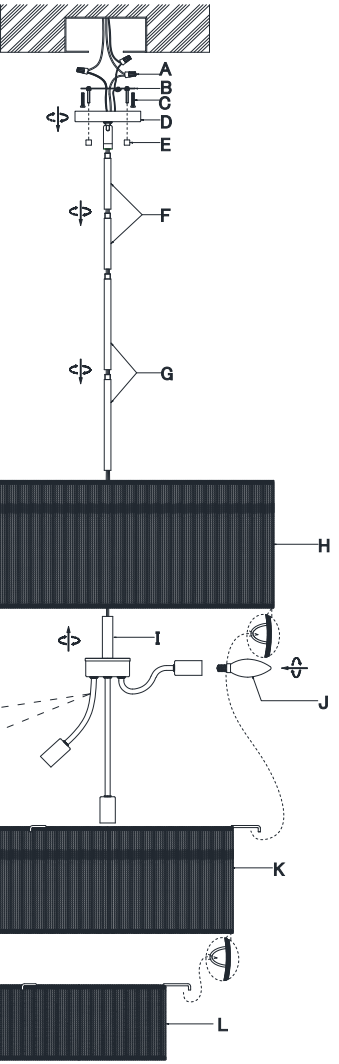

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Instrucciones de Conexión a Tierra:

a) Para instalación en Estados Unidos: Enrolle el cable de tierra de la caja de conexión alrededor del tornillo verde de tornillo de tierra (B) del soporte de montaje, dejando al menos 5 cm del extremo del cable libre. Apriete el tornillo de tierra. Si Si la luminaria incluye un cable de tierra, conéctelo al cable de tierra del tomacorriente utilizando un conector para cables.
b) Para instalación en Canadá: Si la luminaria incluye cable de tierra, enrolle el cable de tierra alrededor del tornillo verde de conexión a tierra en el soporte de montaje. Apriete firmemente el tornillo de tierra.

4. Conecte los cables con el conector (A) según corresponda.
5. Fije la Campana (D) a la Placa de Montaje (B) girando la Tuerca para Campana (E) en sentido horario.
6. Instale la pantalla A (H), pantalla B (K), pantalla C (L) en el gancho y fíjelas al anillo de sujeción.
7. Instale la bombilla (I) en el marco metálico (I).

USE ÚNICAMENTE BOMBILLAS TIPO 'B' DE MÁXIMO 40 VATIOS, BOMBILLAS CFL DE 13 VATIOS O BOMBILLAS LED DE 9 VATIOS. EL PAQUETE INCLUYE 1 BOMBILLA LED DE 4 VATIOS.

DISFRUTE DE SU LÁMPARA